



# Products Catalog

TianJin Mavix scaffolding  
Technology Limited Company



TianJin Mavixscaffolding Technology Limited Company  
Address: No. 65, Xinkai Road, Chunhua Street,  
Hedong District, Tianjin  
Tel: 0086-13302023010  
Email: [info@mavixscaffolding.com](mailto:info@mavixscaffolding.com)  
[www.mavixscaffolding.com](http://www.mavixscaffolding.com)



# CONTENTS

● <u>Company Profile</u>	1
● <u>01 Ringlock Scaffolding</u>	3
● <u>02 Kwikstage Scaffolding</u>	11
● <u>03 Frame Scaffolding</u>	15
● <u>04 Support System</u>	19
● <u>05 Aluminum Mobile Tower</u>	23
● <u>06 Coupler</u>	27
● <u>07 Packing</u>	29

## TianJin Mavix scaffolding Technology Limited Company

**Mavix Scaffolding** is a professional manufacturer and global supplier of high-quality scaffolding systems and construction support solutions. With years of industry experience, we are committed to providing safe, durable, and efficient scaffolding products for building contractors, industrial maintenance companies, rental firms, and construction projects around the world.

We specialize in the production of **Ringlock Scaffolding, Frame Scaffolding, Support System, Aluminum Scaffolding, Steel Planks, Coupler, and a full range of scaffolding accessories.** Our products are widely used in civil construction, infrastructure projects, industrial plants, shipyards, and commercial buildings.



## Company Vision

**To lead globally in safe, innovative scaffolding — enabling every project to rise confidently and sustainably.**

### Ringlock Standard

Surface: Hot-Dip Galvanized



Length/Inches	Diameter	Thickness	Weight
500mm/19.6"	48.3mm	3.2mm	3.2kg
1000mm/39.37"	48.3mm	3.2mm	5.7kg
1500mm/59.06"	48.3mm	3.2mm	8.2kg
2000mm/78.74"	48.3mm	3.2mm	10.5kg
2500mm/98.43"	48.3mm	3.2mm	13.2kg
3000mm/118.11"	48.3mm	3.2mm	15.4kg

### Ringlock Diagonal Brace

Surface: Hot-Dip Galvanized



Length	Diameter	Thickness	Weight
1000*2000mm	48.3mm	2.75mm	8.59kg
1500*2000mm	48.3mm	2.75mm	9.32kg
2000*2000mm	48.3mm	2.75mm	10.27kg
2500*2000mm	48.3mm	2.75mm	11.38kg
3000*2000mm	48.3mm	2.75mm	12.75kg

### Ringlock Ledger

Surface: Hot-Dip Galvanized



Length/Inches	Diameter	Thickness	Weight
500mm/23.62"	48.3mm	2.75mm	2.11kg
1000mm/39.37"	48.3mm	2.75mm	3.92kg
1500mm/59.06"	48.3mm	2.75mm	5.73kg
2000mm/78.74"	48.3mm	2.75mm	7.54kg
2500mm/98.43"	48.3mm	2.75mm	9.35kg

### Ringlock Base Collar

Surface: Hot-Dip Galvanized



Length	Diameter	Thickness	Weight
200	48.3mm	3.25mm	1.95kg



**Ringlock Base Jack**

Surface: Hot-Dip Galvanized

Length	Screw Rod	Plate Size	Weight
600mm	Φ38*5mm	150*150*5mm	3.8kg



**Ringlock 320mm Planks**

Surface: Hot-Dip Galvanized


Length	Height	Thickness	Width	Weight
700mm	76mm	1.5mm	320mm	6.23kg
1000mm	76mm	1.5mm	320mm	8.9kg
1500mm	76mm	1.5mm	320mm	13.25kg
2000mm	76mm	1.5mm	320mm	16.95kg
3000mm	76mm	1.5mm	320mm	23.61kg



**Ringlock Side Bracket**

Surface: Hot-Dip Galvanized

Length	Diameter	Thickness	Weight
390mm	48.3mm	3.2mm	5kg
730mm	48.3mm	3.2mm	6.4kg
1090mm	48.3mm	3.2mm	12kg

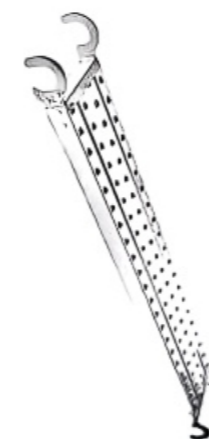

**Ringlock 240mm Planks**

Surface: Hot-Dip Galvanized

Length	Height	Thickness	Width	Weight
1000mm	45mm	1.5mm	240mm	6.4kg
1500mm	45mm	1.5mm	240mm	8.7kg
2000mm	45mm	1.5mm	240mm	11.3kg
2500mm	45mm	1.5mm	240mm	13.7kg
3000mm	45mm	1.5mm	240mm	16.0kg



**Ringlock Wall Anchor Element**

**Surface: Hot-Dip Galvanized**

Length	Diameter	Thickness	Weight
500mm	48.3mm	3.25mm	1.4kg



**Ringlock Aluplywood with Ladder**

**Surface: Hot-Dip Galvanized**

Length	Width	Weight
1500mm	45mm	18kg
2000mm	45mm	21kg
2500mm	45mm	23kg
3000mm	45mm	25kg



**Ringlock Head Jack**

**Surface: Hot-Dip Galvanized**

Length	Screw Rod	Plate	Weight
600mm	Φ38*5mm	170*100*5mm	5.18kg
600mm	Φ38*5mm	100*100*5mm	4.02kg



**Ringlock Steel Truss**

**Surface: Hot-Dip Galvanized**

Length/Inches	Diameter	Thickness	Weight
3000mm	48.3mm	3.2mm	33.81kg
4000mm	48.3mm	3.2mm	45.08kg
5000mm	48.3mm	3.2mm	56.35kg
6000mm	48.3mm	3.2mm	67.62kg

Accessories



Steel Staircase



Aluminum Staircase



Oblique Ladder



Mountable Ladder



Steel Ladder



Safety Gate

Accessories



Double Ends



End and Coupler



U-Head Screw Jack



Swivel Base Jack



Toe Board



Ladder Bracket

### Kwikstage Standard

Surface: Hot-Dip Galvanized



Length/Inches	Diameter	Thickness	Weight
500mm/19.6"	48.3mm	4mm	4.71kg
1000mm/39.37"	48.3mm	4mm	7.03kg
1500mm/59.06"	48.3mm	4mm	10.06kg
2000mm/78.74"	48.3mm	4mm	13.10kg
2500mm/98.43"	48.3mm	4mm	16.14kg
3000mm/118.11"	48.3mm	4mm	19.18kg

### Kwikstage Diagonal Brace

Surface: Hot-Dip Galvanized



Length/Inches	Diameter	Thickness	Weight
1700mm	48.3mm	3mm	7.54kg
2000mm	48.3mm	3mm	8.62kg
2700mm	48.3mm	3mm	10.70kg
3200mm	48.3mm	3mm	13.15kg
3600mm	48.3mm	3mm	14.41kg

### Kwikstage Ledger

Surface: Hot-Dip Galvanized



Length/Inches	Diameter	Thickness	Weight
730mm	48.3mm	3mm	3.32kg
1270mm	48.3mm	3mm	5.37kg
1500mm	48.3mm	3mm	6.25kg
2440mm	48.3mm	3mm	9.83kg
3000mm	48.3mm	3mm	11.53kg

### Kwikstage Transom

Surface: Hot-Dip Galvanized



Length/Inches	Material	Thickness	Weight
730mm	50x50mm	5mm	5.88kg
1000mm	50x50mm	5mm	8.04kg
1500mm	50x50mm	5mm	12.04kg
2440mm	50x50mm	5mm	19.55kg
3000mm	50x50mm	5mm	24.02kg

### Kwikstage Transom

Surface: Hot-Dip Galvanized



Length/Inches	Material	Thickness	Weight
730mm	40x40mm	4mm	2.15kg
1000mm	40x40mm	4mm	3.03kg
1500mm	40x40mm	4mm	4.65kg
1830mm	40x40mm	4mm	5.72kg
2440mm	40x40mm	4mm	7.70kg

### Kwikstage 240mm Planks

Surface: Hot-Dip Galvanized



Length	Height	Thickness	Width	Weight
1000mm	45mm	1.5mm	240mm	6.4kg
1500mm	45mm	1.5mm	240mm	8.7kg
2000mm	45mm	1.5mm	240mm	11.3kg
2500mm	45mm	1.5mm	240mm	13.7kg
3000mm	45mm	1.5mm	240mm	16.0kg


### Accessories



Kwikstage Base Jack



Toe Board Bracket

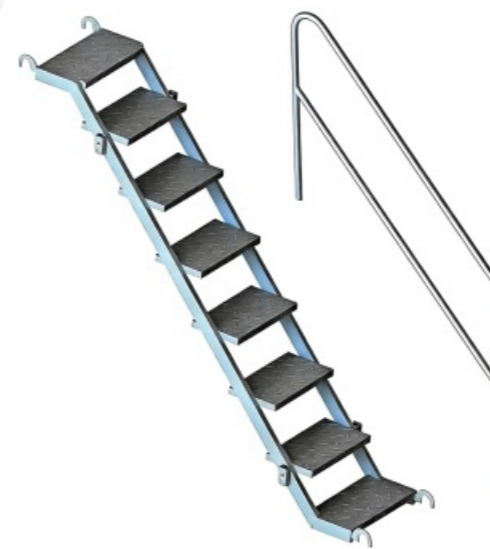

Steel Staircase



Hop Up




End Toe Board Clip



Hop Up

### A Frame Scaffolding

Surface: Powder Coated/ HDG

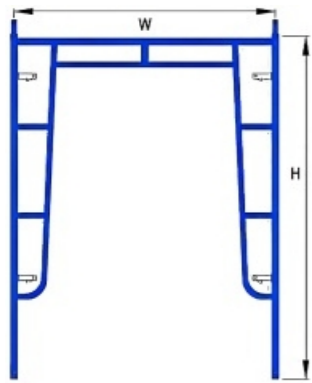

Material	Height	Width
Q235/Q355	5'7" (1700mm)	4' (1219mm)
Q235/Q355	6'4" (1930mm)	4' (1219mm)
Q235/Q355	4' (1219mm)	5' (1524mm)
Q235/Q355	6'4" (1930mm)	5' (1524mm)
Q235/Q355	6'7" (2007mm)	5' (1524mm)

### Ladder Frame Scaffolding


Surface: Powder Coated/ HDG



Material	Height	Width
Q235/Q355	5' (1524mm)	2' (609mm)
Q235/Q355	6'4:" (1930mm)	2' (609mm)
Q235/Q355	4' (1219mm)	3' (914mm)
Q235/Q355	5' (1524mm)	3' (914mm)
Q235/Q355	6' (1828mm)	3' (914mm)

### H Frame Scaffolding


Surface: Powder Coated/ HDG

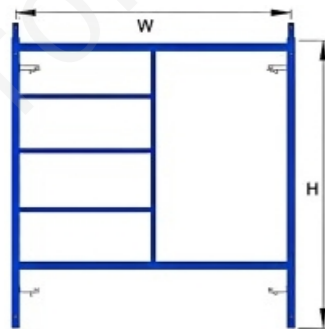

Material	Height	Width
Q235/Q355	5' (1524mm)	4' (1219mm)
Q235/Q355	3' (914mm)	5' (1524mm)
Q235/Q355	4' (1219mm)	5' (1524mm)
Q235/Q355	5' (1524mm)	5' (1524mm)
Q235/Q355	6'4" (1930mm)	5' (1524mm)

### Euro Assembly Frame Scaffolding

Surface: Powder Coated/ HDG

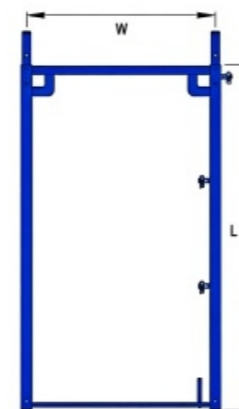

Material	Height	Width
Q235/Q355	3'3" (1000mm)	2'5" (730mm)
Q235/Q355	6'7:" (2000mm)	2'5" (730mm)



**Aluminum Board With Hook**

**Material: 6061-T6**

Length	Width	Thickness
6'	19.25"	2mm
7'	19.25"	2mm
8'	19.25"	2mm
9'	19.25"	2mm
10'	19.25"	2mm



**Aluminum Board With Plywood**

**Material: 6061-T6**

Length	Width	Weight
1500mm	610mm	15kg
2000mm	610mm	18kg
2500mm	610mm	21kg
3000mm	610mm	24kg

**Accessories**



Rivet Pin



Gravity Pin



Pig Tail Pin



Spring Pin



Span Pin



Flip Lock



Fast Lock



C-Lock




Coupling Pin



Cross Brace




8' Caster

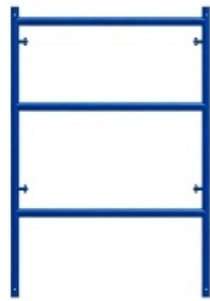

**Shoring Frame 1800\*1200mm**

**Surface: Powder Coated**


Standard Tube	Ledger Tube	Weight
48*3.6*1800mm	48*3*1200mm	25.38kg



**Shoring Frame 1500\*1200mm**

**Surface: Powder Coated**

Standard Tube	Ledger Tube	Weight
48*3.6*1500mm	48*3*1200mm	23.05kg



**Shoring Frame 1200\*1200mm**

**Surface: Powder Coated**

Standard Tube	Ledger Tube	Weight
48*3.6*1200mm	48*3*1200mm	17.05kg



**Heavy Prop**

**Surface: Hot-Dip Galvanized/Powder Coated**

Adjustable Height	Plate	External Tube	Internal Tube
1500-2500mm	120*120*5mm	60x4.0mm	48x4.0mm
1800-3200mm	120*120*5mm	60x4.0mm	48x4.0mm
2200-4000mm	120*120*5mm	60x4.0mm	48x4.0mm
2800-5000mm	120*120*5mm	60x4.0mm	48x4.0mm



**Light Prop**

**Surface: Hot-Dip Galvanized/Powder Coated**

Adjustable Height	Plate	External Tube	Internal Tube
1500-2200mm	120*120*5mm	60x2.0mm	48x2.5mm
1600-2400mm	120*120*5mm	60x2.0mm	48x2.5mm
1800-2600mm	120*120*5mm	60x2.0mm	48x2.5mm
2000-3200mm	120*120*5mm	60x2.0mm	48x2.5mm



**Cross Brace**

**Surface: Pre-Galvanized**

Size	Thickness	Weight
25.4* (914*1500) mm	1.8mm	3.77kg



**Connector**

**Surface: Powder Coated**

Diameter	Thickness	Weight
38mm	2.0mm	0.6kg



**Fork Head**

**Surface: Hot-Dip Galvanized**

Plate	Angle steel	Steel pipe	Weight
230*145*5mm	30*30*3*195mm	32*2*135mm	2.5kg

**Accessories**



Base Jack



Shoring U Head



Steel Prop Tripod



Shoring Base Plate



Hitch Pin



**Single Aluminum Mobile Tower**


Type	Single Wide 750mm
Material	Aluminum 6061-T6
Certification	EN1004
Platform Height	2M,4M,6M,8M,10M,12M,14M
Max Safety Load	275kg for each floor
	720kg for each tower



**Single Aluminum Mobile Tower**


Type	Double Wide 1350mm
Material	Aluminum 6061-T6
Certification	EN1004
Platform Height	2M,4M,6M,8M,10M,12M,14M
Max Safety Load	275kg for each floor
	720kg for each tower

**Aluminum Mobile Tower Details:**

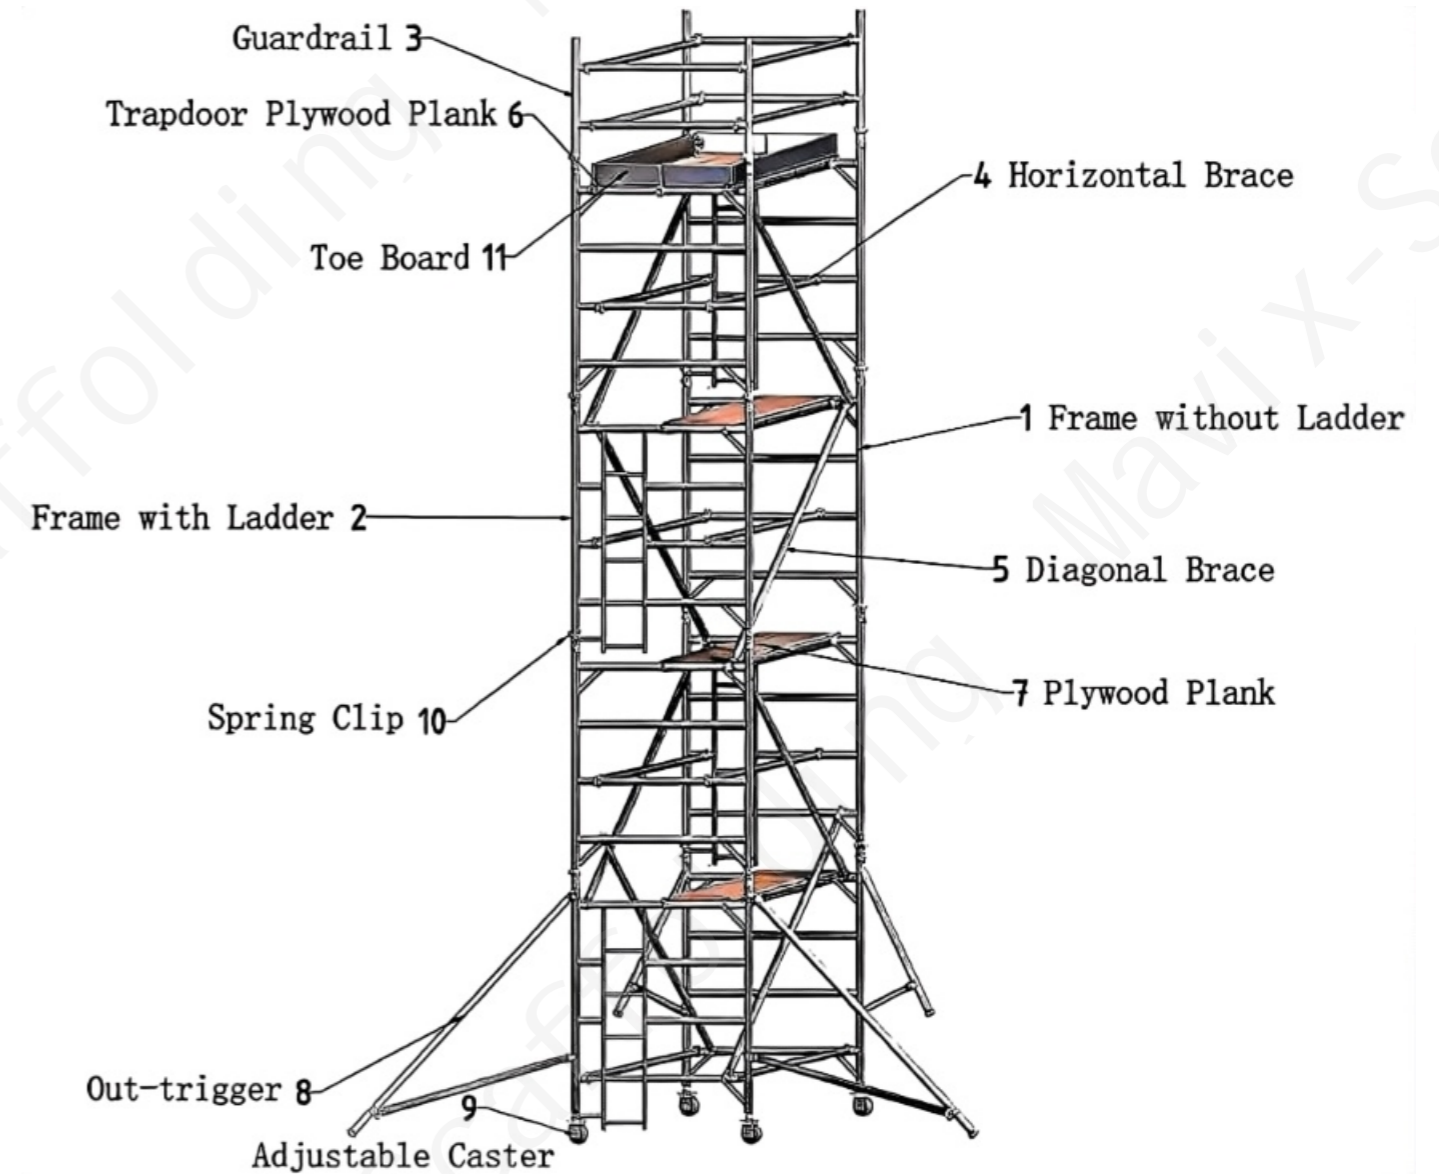

## Type Mobile Tower

### Single Wide

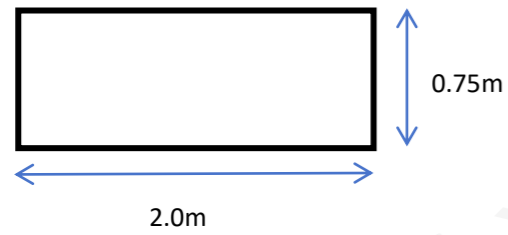

Working Height

Tower Height


Platform Height




4m



6m

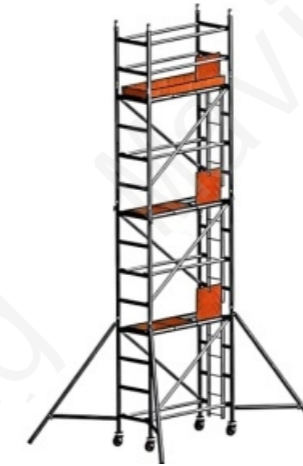


8m

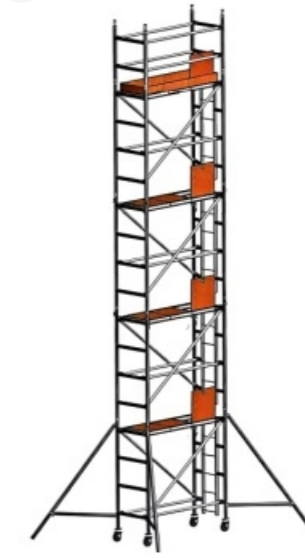

10m

### Double Wide

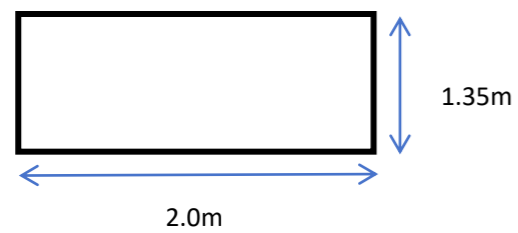

Working Height

Tower Height

Platform Height




4m



6m



8m

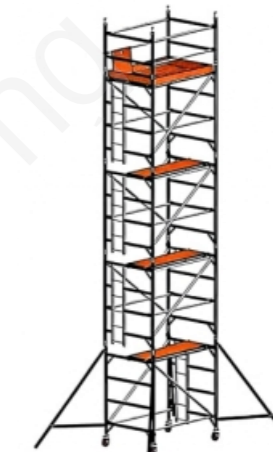








10m

## Forged Coupler

Picture	Name	Specification	Description	Weight
	Fix Coupler	48.3*48.3mm	Electro-Galvanized	0.98kg
	Swivel Coupler	48.3*48.3mm	Electro-Galvanized	1.12kg
	Beam Coupler	48.3mm	Electro-Galvanized	1.5kg
	Sleeve Coupler	48.3*48.3mm	Electro-Galvanized	1.0kg
	Putlog Coupler	48.3*48.3mm	Electro-Galvanized	0.64kg
	Ladder Coupler	48.3mm	Electro-Galvanized	0.72kg
	Board Coupler	48.3mm	Electro-Galvanized	0.6kg

## Pressed Coupler

Picture	Name	Specification	Description	Weight
	Fix Coupler	48.3*48.3mm	Electro-Galvanized	0.65kg
	Swivel Coupler	48.3*48.3mm	Electro-Galvanized	0.65kg
	Joint Pin	48.3*48.3mm	Electro-Galvanized	0.65kg
	Sleeve Coupler	48.3*48.3mm	Electro-Galvanized	1.0kg
	Putlog Coupler	48.3mm	Electro-Galvanized	0.62kg
	Mushroom Coupler	48.3mm	Electro-Galvanized	0.3kg
	Ladder Coupler	48.3mm	Electro-Galvanized	0.45kg

